



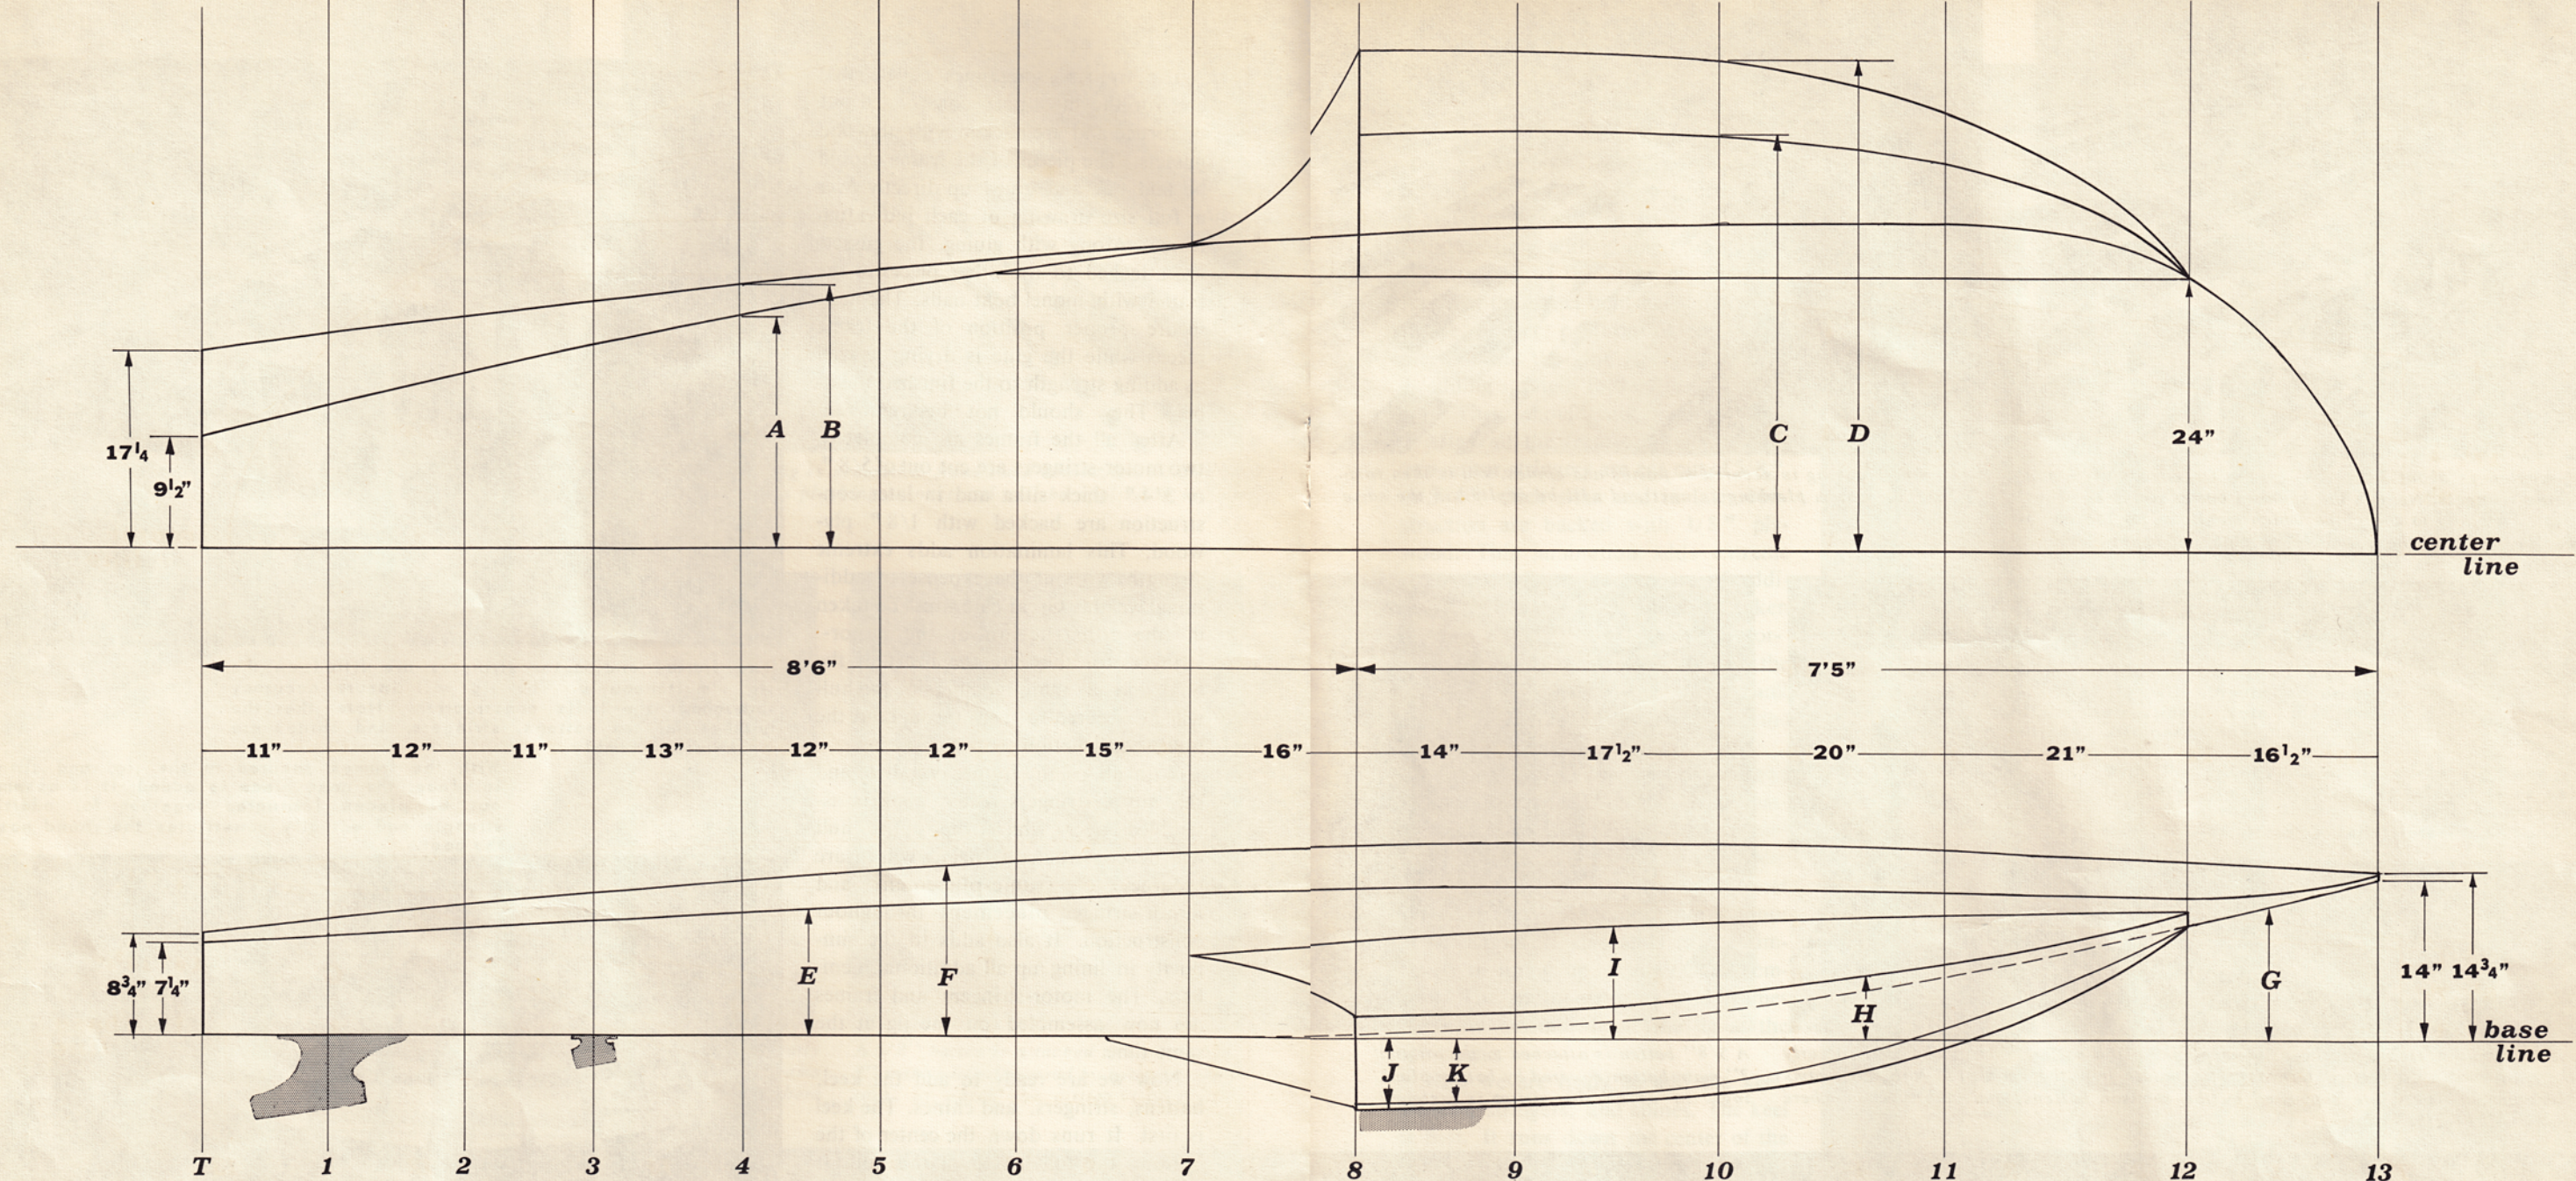

Hardware, running gear installations featured next month

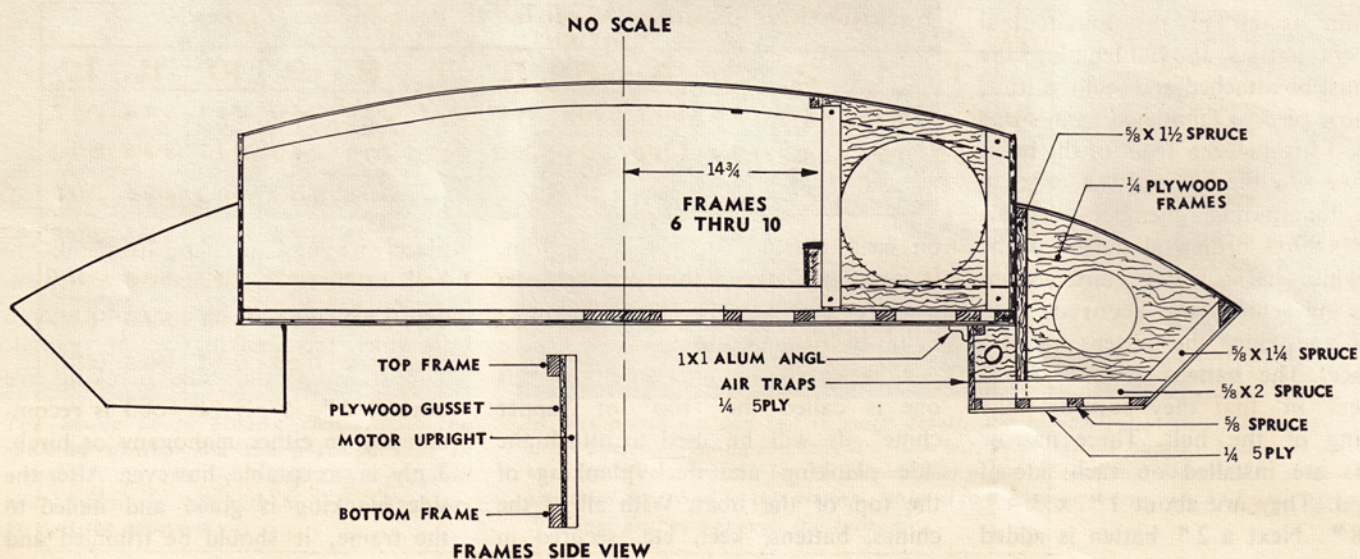

BILL OF MATERIALS

BOTTOM FRAMES	5/8" X 1 5/8"	SPRUCE
KEEL	5/8" X 4"	SPRUCE
DECK FRAMES	5/8" X 2"	FIR PLYWOOD
SIDE FRAMES	5/8" X 1 1/4"	SPRUCE
BOTTOM BATENS	5/8" X 1"	SPRUCE
CHINES	5/8" X 1"	SPRUCE
SHEERS	5/8" X 1"	SPRUCE
DECK BATTENS	5/8" X 1"	SPRUCE
STRINGERS	5/8" X 5"	SPRUCE
(back with 1/8" plywood on inner side)		
GUSSETS	1/4 or 1/8 MAHOGANY PLYWOOD	
STRINGER UPGHTS	5/8" X 1 1/2"	SPRUCE
DECKING	1/4 or 1/8 3 ply MAHOG. PLYWOOD	
SIDES	1/4" 3 ply MAHOG. PLYWOOD	
SPONSON DECKING	1/4" "	"
BOTTOM	1/4" PLYWOOD (5 ply) MAHOG.	
SPONSON BOTOMS	1/4" 5 ply MAHOG. or BIRCH	
SPONSON NONRIPS	1/4" 5 ply MAHOG. or BIRCH	
3/4" ANCHORIST NAILS		
1 1/4" #8 FLATHEAD WOOD SCREWS		
1 1/2" #8 "		
WELDWOOD WATERPROOF GLUE		
(Although directions specify either 3/4 or 5/8 inch pieces for framing, battens etc., 5/8" is preferred).		

TABLE OF OFFSETS

station heights above baseline, in Feet, Inches, Eights

ITEM	T	1	2	3	4	5	6	7	8	9	10	11	12
A	0-9-4	1-0-3	1-3-2	1-5-6	1-8-3	1-10-4	2-0-3	2-2-1	2-3-3	2-4-0	2-4-3	2-4-6	2-0-2
B	1-5-2	1-6-6	1-8-2	1-9-4	1-11-0	2-0-1	2-1-2	2-2-3	2-3-3	2-4-0	2-4-3	2-4-6	2-0-2
C									3-0-3	3-0-3	3-0-2	2-9-1	2-0-2
D									3-7-2	3-7-2	3-6-4	3-2-1	2-0-2
E	0-7-4	0-8-1	0-9-0	0-9-6	0-10-5	0-11-3	1-0-0	1-0-6	1-1-2	1-1-3	1-1-2	1-0-6	0-11-6
F	0-8-6	0-9-7	0-11-0	1-0-1	1-1-3	1-2-3	1-3-3	1-4-2	1-5-0	1-5-2	1-5-3	1-4-6	1-3-5
G									0-0-2	0-1-0	0-2-5	0-5-5	0-10-1
H									0-1-2	0-2-3	0-4-0	0-6-5	0-10-5
I									0-8-4	0-9-3	0-7-5	0-10-7	0-10-7
J									0-6-2	0-5-5	0-4-6	0-0-5	0-9-7
K									0-6-0	0-5-1	0-3-5	0-1-0	0-10-1